

NOTES:

FIXTURE TYPE:

PROJECT:



SML-303N

FEATURES

LISTING

- UL and CUL listed for Wet Locations.

HOUSING

- Die-cast aluminum body.

LEDs

- New generation LED

FINISH

- UV stabilized power coated finish

OPTIONS

- Finish - Bronze. Color option with adder.

SPECIFICATIONS

- Low glare lens providing visual comfort.


- Optional 8W EM with metal test button

- Optional microwave occupancy sensor

- Smart controller for a range of wattages to choose from (70W series only)



SML-303N

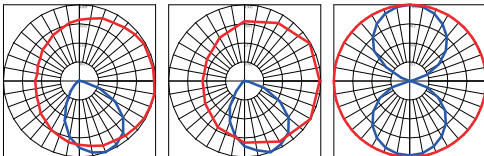

PRODUCT DESCRIPTION

This quarter sphere full cut-off wall pack is elegant as it is functional. With high performance LEDs and long lasting driver, this fixture provides effective lighting all around. It can be used around factories, restaurants, shopping centers, etc. Optional Kelvin color with adder.


ORDERING INFORMATION

EXAMPLE: SML-303N-30W-UNV-7-30-BK-FT

Model	Watts	Voltage	CRI	Color Temp	Finish	Reflector	Options
SML-303N	30W 50W 72W	UNV= 120-277VAC	7=70+	30=3000K 40= 4000K 50=5000K	BZ=Bronze	FT = Forward Throw WT= Wide Throw	BLANK = No Sensor OC = Occupancy Sensor EM = Emergency Driver SS = 10KV Surge



DIMENSIONS

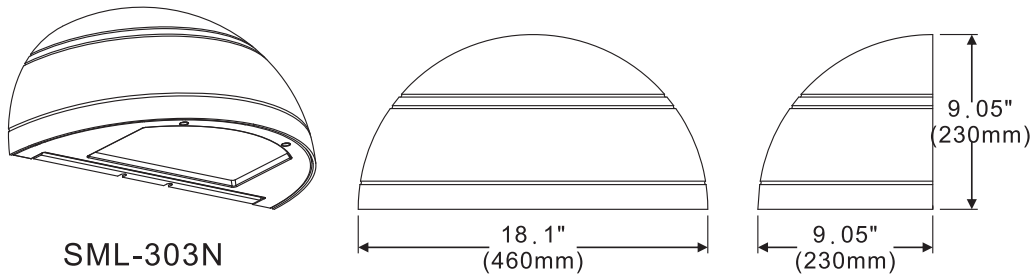

PERFORMANCE DATA


Model NO.	System Watts	Lumens**	Efficacy
SML-303N	30W	3811 lm**	131 lm/W**
	50W	6410 lm**	125 lm/W**
	15/30/50/72W	8621 lm**	120 lm/W**
Lumen and Efficacy are based on the highest wattage at 5000K			

QUICK MOUNT GUIDE



Unlike other fixtures which require more than two people to install, our IMB (Intelligence Mounting Bracket) helps you save time and money. With its light, small and user friendly, you can install this fixture easily with only one person in a much shorter time. Meanwhile, you can check the leveling by using the integrated level bubble on the mounting bracket. In this competitive industry, we understand the importance of saving you labor cost and time.



Uninstall the mounting bracket from fixture base plate by unscrewing the 2 hex socket studs.



Remove the mounting bracket.



Level the bracket to intend altitude, install the bracket on the wall.



Lift the fixture up and tilt slightly toward the wall mounted bracket as figure D shown, hook the fixture base plate with the mounting bracket.



Screw tight the bracket and fixture.