

L70  
25°C

50,000 Hours



## FEATURES

- Available in 4000k.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 50,000 hours of operation.\*\*
- Provides 3,640 nominal lumens.
- 48 nominal watts.
- Color rendering index (Ra) > 80.
- Input voltage = 120-277V (50-60Hz).
- 0-10V dimming.
- Installs from below ceiling and secured by tension clips. NOTE: tension clips are not provided with the luminaire.
- Flexible conduit with quick-connector is standard.
- Integral heat sink for heat disbursement.
- This device is not intended for use with emergency exits.


## WARRANTY

- cULus listed for damp and wet locations.
- Title 24 compliant.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\*Contact factory for other color temperatures and lumen packages.

\*\*L70 hours are IES TM-21-11 calculated hours.

## DIMENSIONS

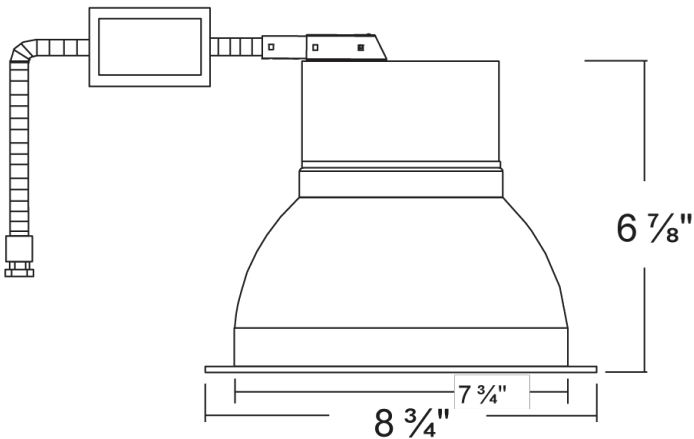

## ORDERING INFORMATION



Model	Description
BRK-LED48ARC8-4K	8" ARCHITECTURAL RETROFIT, 4000K, 3,640 LUMENS, 48 WATTS