



Wiring Compartment on the Top for easy access and ease of installation.

Cooling channels allow vertical airflow



Optional Mount



Photo control



480V Max Receptacle

FEATURES

LISTING

- UL and CUL listed for Wet Locations.

HOUSING

- Corrosion resistant heavy duty-cast aluminum construction. Standard 2 3/8" open on the bottom. Pass 3 G vibration testing.
- Wiring Compartment on the Top for easy access and ease of installation.

FINISH

- Superior powder coat finish to withstand the toughest weather.

OPTIONS

- Precision injection-molded, UV polycarbonate Optic Lens
- Optional photocell with adder
- Optional 347 with adder

PRODUCT DESCRIPTION


This post top provides a subtle but stylish look for any job site. It is designed to save energy and reduce installation time. Optional photo-control options allow for additional energy savings. It also has optional Kelvin color with adder.

ORDERING INFORMATION

EXAMPLE: LED-9800

Model	Wattage	Voltage	CRI	Color Temp	Distribution	Option/Accessories	Finish	Starting Temp
LED-9800	053=53W 082=82W 136=136W	UNV=120-277V	7=70+	40=4000K 50=5000K	T5=Type VS	XS=10kv Surge OS=Occupancy Sensor	BZ=Bronze WT=White	-40°C

DIMENSIONS

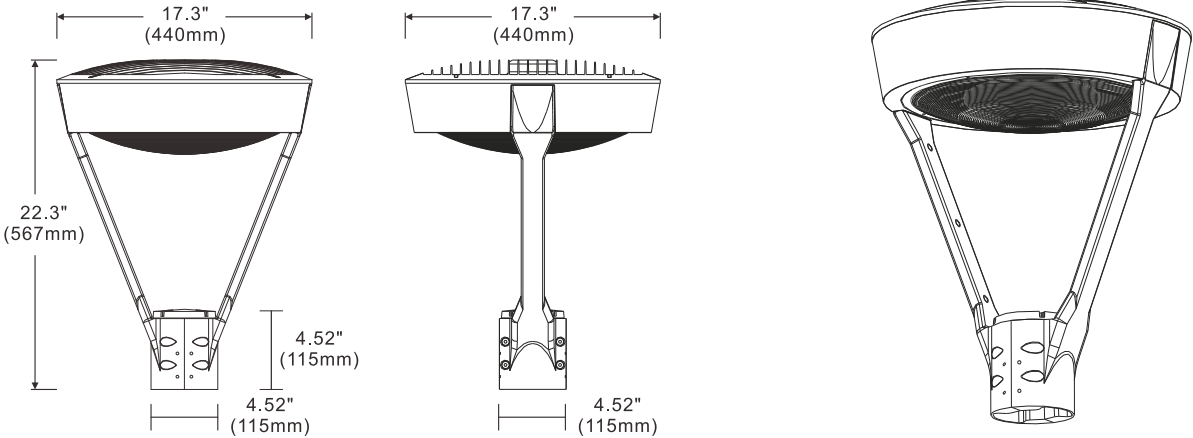

PERFORMANCE DATA

Model No.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-9800	53W	Type VS	7004 lm**	133 lm/W	4	3	3
	82W	Type VS	10200 lm**	125 lm/W	4	3	3
	136W	Type VS	14549 lm**	107 lm/W	4	3	3