


L70  
25°C

181,000 Hours



## DIMENSIONS

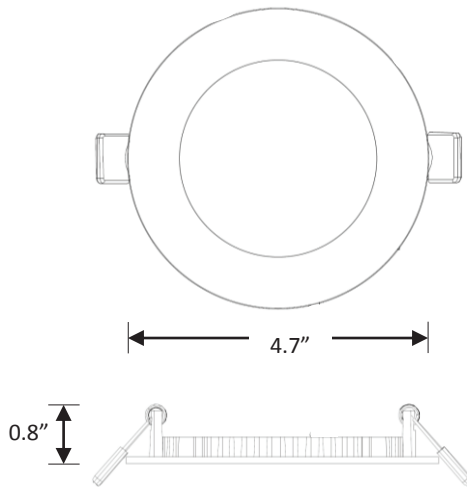

Weight: 0.25 lbs.

## FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 181,000 hours of operation.\*\*
- Color rendering index (Ra) > 90.
- 600 nominal lumens.
- 7 nominal watts.
- 120 AC voltage (60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Triac dimming.
- Aluminum housing.
- Easy installation in new construction or retrofit applications.
- Compatible with 4.30" ceiling cut-outs.
- Type IC. Access above ceiling required. Covered ceiling mount only.

\*Contact factory for other color temperatures and lumen packages.

\*\*L70 hours are IES TM-21-11 calculated hours.

## WARRANTY

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (0.5kV).
- 5-year warranty of all electronics and housing.

## ORDERING INFORMATION

EXAMPLE: KOK-4EJCT09SR05



Model	Color Temperature
KOK-4EJCT09SR05	Selectable CCT
	2700k
	3000k
	3500k
	4000k
	5000k