

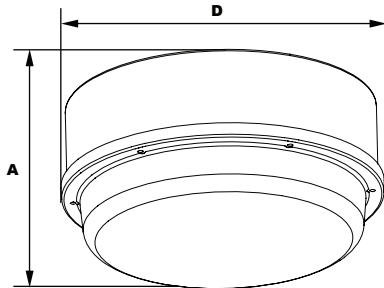
L70  
25°C

147,000 Hours



## DIMENSIONS

Diameter (D)	11½" (291mm)
Height (A)	6" (150mm)



## FEATURES

**Housing:**

Die Cast Aluminum Housing, Nickel-Plated Stainless Steel Hardware.

**Listing & Ratings:**

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment.

**Finish:**

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Lens:**

SoftLED Low Profile LumaLens Opal Polycarbonate Vandal-Resistant Lens

**Mounting Options:**

Included Easy-Hang Bracket Fits Standard 4" Electrical Box, Allowing One-Person Installation.

**EasyLED LED:**

Aluminum Boards

**Wattage:**

Array: 34w, System: 38.9w; (100w HID Equivalent)

**Driver:**

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF&gt;0.90. Standard Internal Surge Protection 4kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Controls:**

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

**Warranty:**5-Year Warranty for -40°C to +40°C Environment.  
See Page 2 for Projected Lumen Maintenance Table.

## PRODUCT DESCRIPTION

The VNR34Q Low Profile Round Surface Mount luminaire is available for surface with an optical distribution designed specifically to replace HID lighting systems up to 100w MH or HPS. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 16 feet can be used based on light level and uniformity requirements.

## ORDERING INFORMATION

EXAMPLE: VNR34QF1X34U5KLPZSP

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
VNR34Q = EasyLED Low Profile Round Surface Mount	F=Type V	1X34 =34w	U=120-277V H=347-480V	4K =4000K 5K =5000K	LP =SoftLED Low Profile LumaLens Opal Polycarbonate Lens	Z=Bronze C=Custom (Consult Factory)	SF =Single Fuse (120-277V Only) DF =Double Fuse (120-277V Only) SP =Surge Protection S2 =Microwave Sensor with Dimming for Mounting Heights of 8 to 40' (120-277V Only) BU =Battery Backup, 90 Minutes BUC = Cold Start Battery Backup -20°C, 90 minutes (120-277v Only)

## ACCESSORIES &amp; REPLACEMENT PARTS



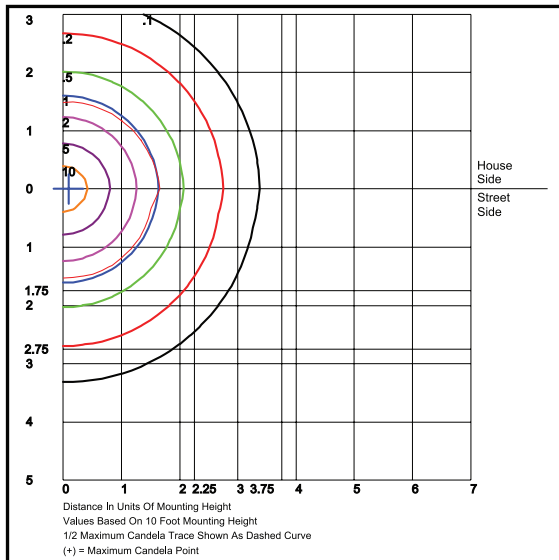
P17117

Replacement Parts  
(Order Separately, Field Installed)

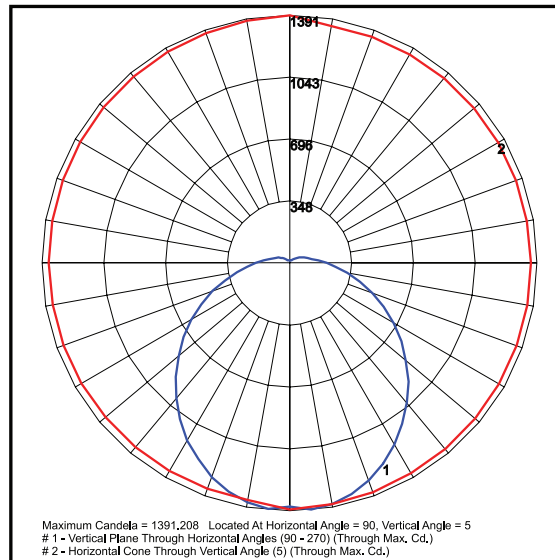
P17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

## PHOTOMETRIC DATA

VNR34QF1X34U5KLP  
Type V

Grid in MH  
MH=10 Feet

VNR34QF1X34U5KLP  
Type V

## PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 34w	117	39	Type V	4,725	121	2	3	2	4,536	117	2	3	2

## PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT				Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C	
L70 Lumen Maintenance @ 25°C / 77°F	39	1.00	0.95	0.90	0.80	147,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C	
L70 Lumen Maintenance @ 50°C / 122°F	39	1.00	0.89	0.78	0.55	67,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C	
L80 Lumen Maintenance @ 40°C / 104°F	39	1.00	0.92	0.85	0.70	66,000	

## NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 117mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.