



LED LiteBars™ LB Series



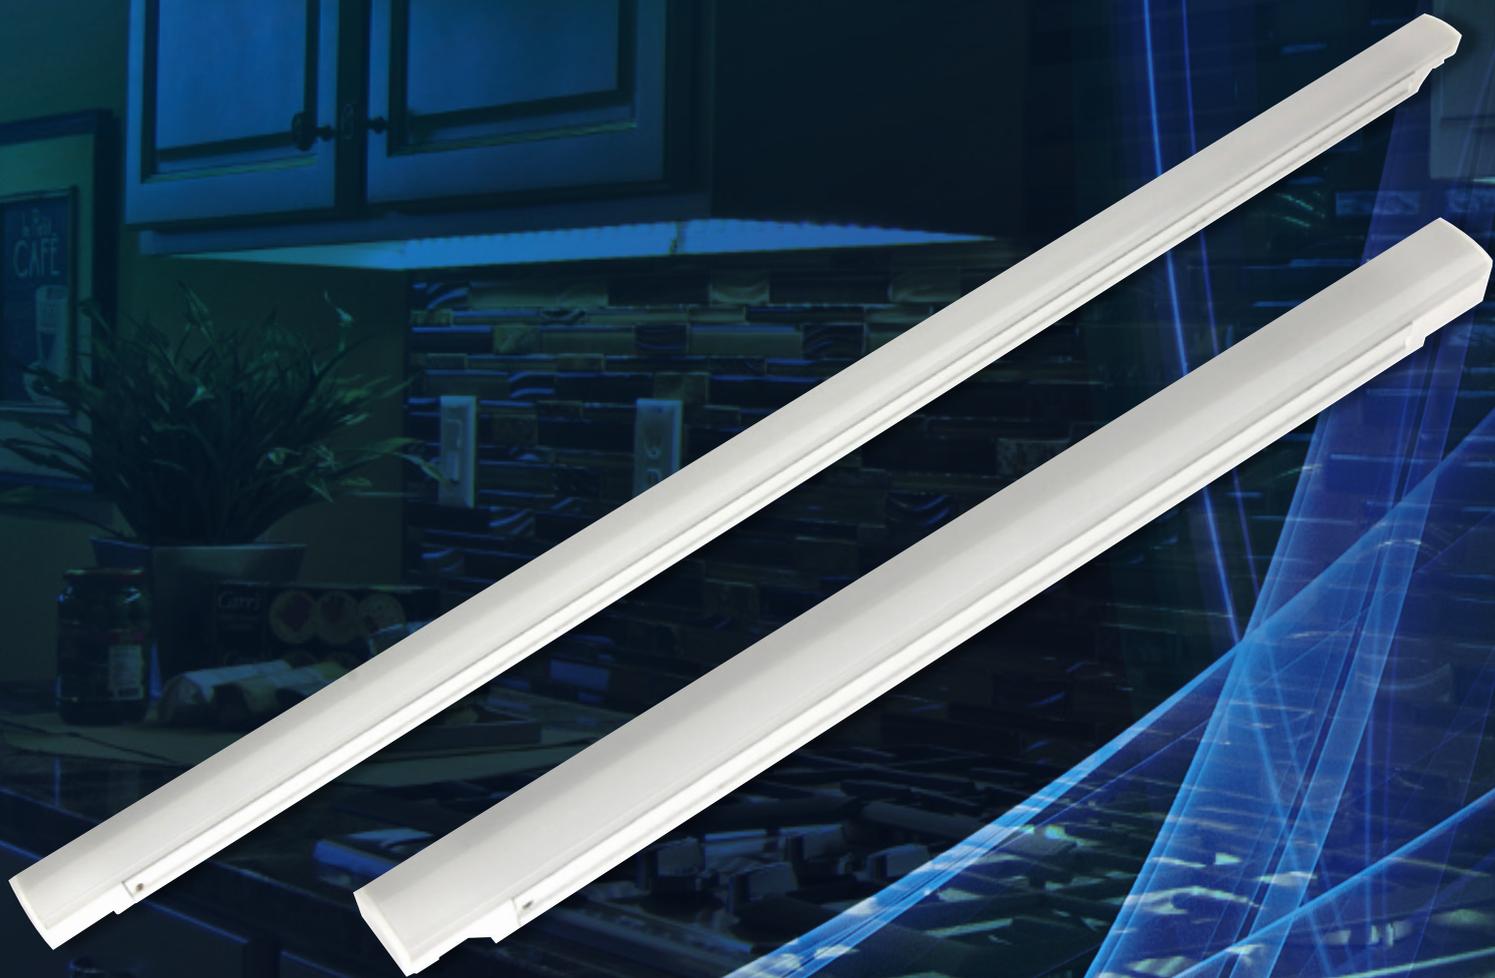

DIMENSIONS



PRODUCT DESCRIPTION

LED LiteBars™ offer endless possibilities for designing functional or decorative lighting. Linkable in continuous runs, LiteBars produce beautiful, even light with superior dimming performance. Ultra-compact and simple to mount, the bars can navigate the tightest corners and illuminate the smallest spaces with ease.

FEATURES

- Dimmable down to 10%, with forward phase or reverse phase dimmers
- Operating Temperature 0°-104° F
- Patent-pending integrated connector allows LiteBars to be connected for long runs of up to 40'
- 3 mounting options available: Standard bracket, Pivot bracket, Magnetic mounting
- Hardware and plug-in configurations available
- Suitable for damp locations
- 120 Vac operation at 60Hz
- Supports Compliance of CEC T-20 2016

ORDERING INFORMATION

Family	Size	CRI	CCT
LB= LITEBAR	06= 6" 12= 12" 24= 24" 36= 36" 48= 48"	(OMIT)= 80 CRI	27= 2700K 35= 3500K 50= 5000K

APPLICATION

- Under cabinet
- Cove lighting
- Accent & indirect lighting
- Wall washing
- Display
- Base cabinet toe kick

ACCESSORIES

MODEL NUMBER	DESCRIPTION	PRODUCT IMAGE
LB-BBC	Bar- Bar Connector	
LB-BBCF4	Bar-Bar Connector, Flexible 4"	
LB-BBCF12	Bar-Bar Connector, Flexible 12"	
LB-BBCF40	Bar-Bar Connector, Flexible 40"	
LB-BBCR	Bar-Bar Connector, 90 deg right	
LB-BBCL	Bar-Bar Connector, 90 deg left	
LB-MB	Mounting Bracket (2pcs per)	
LB-PMB	Pivot Mounting Bracket (2pcs per)	
LB-MMB	Magnetic Mounting Bracket (2pcs per)	
LB-CBOX	Connector Box	
LB-DBOX	Distribution Box	
LB-HWC70	70" Hardwire Cord	
LB-PC48	40" Plug Cord	

EXAMPLE: LB06927