


# ROUND & SQUARE BULKHEADS



WPR25GRQ

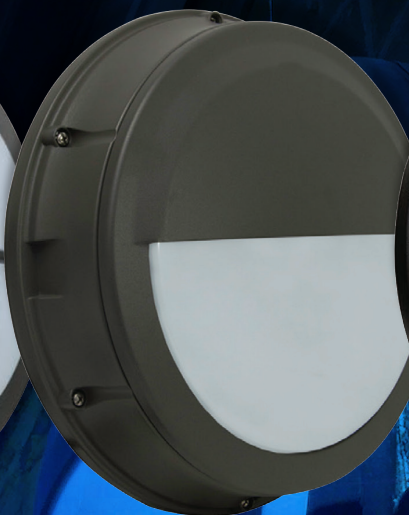

WPR25HCQ



WPR25OFQ



WPS25GRQ




WPS25HCQ



WPS25OFQ






## PRODUCT DESCRIPTION

The Excel Round Bulkhead is designed to replace HID lighting systems up to 250w MH or HPS. The half-cutoff frame helps protect the UV-Stabilized Polycarbonate lens and adds a decorative appearance. Typical applications include office and public buildings, condominiums, schools, shopping malls, and hospitality. Recommended mounting heights are 8 to 20 feet.

## ORDERING INFORMATION

EXAMPLE: WPR25OFQF1X25U5KLZSF

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
<b>WPR25OFQ</b> = EasyLED Excel Round Bulkhead Open Frame <b>WPR25HCQ</b> = EasyLED Excel Round Bulkhead Half Cutoff Frame <b>WPR25GRQ</b> = EasyLED Excel Round Bulkhead Grid Frame	F=Type IV	1X12 =12w 1X17 =17w 1X25 =25w	U=120-277V C=347V* H=347-480V♦ *12w & 17w only ♦25w only	3K =3000K 4K =4000K 5K =5000K	L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens	Z=Bronze W=White C=Custom (Consult Factory)	SF =Single Fuse* DF=Double Fuse* SP =Surge Protector PC3 =Photocell, 120-277VAC P10 =Pencil Photocell, 120VAC P12 =Pencil Photocell, 277VAC P14 =Pencil Photocell, 120-277VAC S2 =Microwave Sensor with Dimming for Mounting Heights of 8' to 40' S4 =Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'.* BU =Battery Backup, 90 Minutes* *120-277V Models Only.

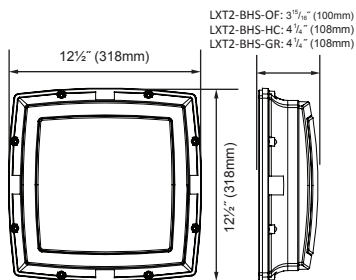

## PRODUCT DESCRIPTION

The Excel Square Bulkhead is designed to replace HID lighting systems up to 250w MH or HPS. The grid frame helps protect the UV-Stabilized Polycarbonate lens and adds a decorative appearance. Typical applications include office and public buildings, condominiums, schools, shopping malls, and hospitality. Recommended mounting heights are 8 to 20 feet.

## ORDERING INFORMATION

EXAMPLE: WPS25OFQF1X25U5KLZSF

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
<b>WPS25OFQ</b> = EasyLED Excel Square Bulkhead Open Frame <b>WPS25HCQ</b> = EasyLED Excel Square Bulkhead Half Cutoff Frame <b>WPS25GRQ</b> = EasyLED Excel Square Bulkhead Grid Frame	F=Type IV	1X12 =12w 1X17 =17w 1X25 =25w	U=120-277V C=347V* H=347-480V♦ *12w & 17w only ♦25w only	3K =3000K 4K =4000K 5K =5000K	L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens	Z=Bronze W=White C=Custom (Consult Factory)	SF =Single Fuse* DF=Double Fuse* SP =Surge Protector PC3 =Photocell, 120-277VAC P10 =Pencil Photocell, 120VAC P12 =Pencil Photocell, 277VAC S2 =Microwave Sensor with Dimming for Mounting Heights of 8' to 40' S4 =Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'.* BU =Battery Backup, 90 Minutes* *120-277V Models Only.