

L70
25°C


56,000 Hours




FEATURES

- Field selectable 3000k (warm white) 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 56,000 hours of operation.**
- Color rendering index (Ra) > 90.
- Field selectable lumen output –1,000, 1,500, or 2,000 nominal lumens.
- 22 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- 1-10VDC dimming is standard.
- Aluminum housing with white smooth reflector.
- Easy installation in new construction or retrofit applications. Flexible conduit attaches to junction box.
- Compatible with 6.25" ceiling cut-outs and 6" mounting frames.
- Type non-IC. Access above ceiling required.
- This device is not intended for use with emergency exits.

DIMENSIONS

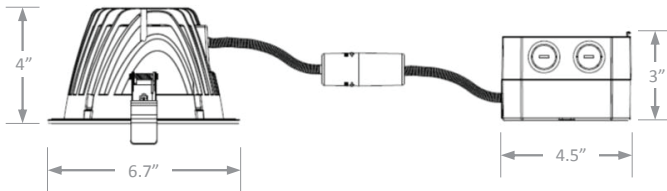

BL6CLED-ND

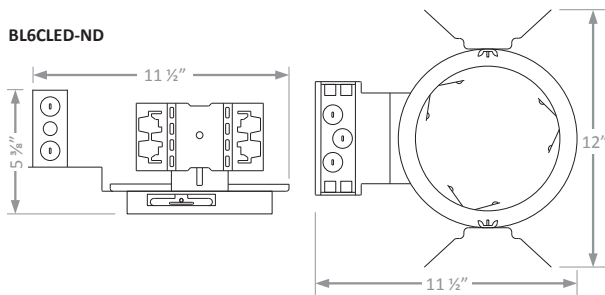

Weight: 2 lbs.

WARRANTY

- cETLus listed for wet locations.
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5 surge protection (line-neutral, 1kV).
- 5-year warranty of all electronics and housing.

*Contact factory for other color temperatures and lumen packages.

**L70 hours are IES TM-21-11 calculated hours.

ORDERING INFORMATION

EXAMPLE: BRK-6A-LKFS



Model	Lumen Output/Color Temperature		Accessories (Order Separately)
BRK-6A	LKFS*	Selectable Lumens	BL6CLED-ND = Mounting frame with j-box
		Selectable CCT	
		1,000 lm 3000k 1,500 lm 3500k 2,000 lm 4000k 5000k	

*Field selectable