


L70  
25°C

54,000 Hours



## DIMENSIONS

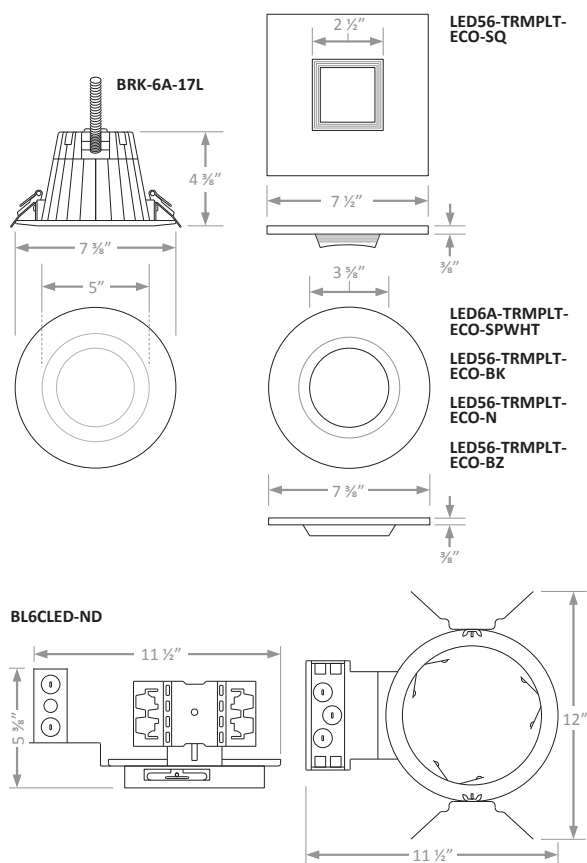

Weight: 1.5 lbs.

## FEATURES

- Available in 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 54,000 hours of operation.\*\*
- Color rendering index (Ra) > 80.
- Provides 1,700 nominal lumens.
- 18 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- 0-10VDC dimming is standard.
- Aluminum housing with white baffle trim.
- Easy installation in new construction or retrofit applications. Flexible conduit attaches to junction box.
- Compatible with 6.25" ceiling cut-outs and 6" mounting frames.
- Type IC, inherently protected. Access above ceiling required.
- This device is not intended for use with emergency exits.

## WARRANTY

- cULus listed for wet locations.
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5 surge protection (line-neutral, 1kV; line-neutral-ground, 2.5kV).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\*Contact factory for other color temperatures and lumen packages.

\*\*L70 hours are IES TM-21-11 calculated hours.

## ORDERING INFORMATION

EXAMPLE: BRK-6A-17L-5K



Model	Lumen Output	Color Temperature	Accessories (Order Separately)
BRK-6A	17L = 1,700	35K = 3500k 4K = 4000k 5K = 5000k	LED6A-TRMPLT-ECO-SPWHT = Silver & white snap trim LED56-TRMPLT-ECO-N = Silver & nickel snap trim LED56-TRMPLT-ECO-BK = Black snap trim LED56-TRMPLT-ECO-BZ = Bronze & mocha snap trim LED56-TRMPLT-ECO-SQ = White square snap trim BL6CLED-ND = Mounting frame with j-box