


**L70**  
25°C **56,000 Hours**



### FEATURES

- Field selectable 3000k (warm white) 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 56,000 hours of operation.\*\*
- Color rendering index (Ra) > 90.
- Field selectable lumen output – 2,000, 3,000, 4,000 or 5,000 nominal lumens.
- 53 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- 1-10VDC dimming is standard.
- Aluminum housing with white slim reflector.
- Easy installation in new construction or retrofit applications. Flexible conduit attaches to junction box.
- Compatible with 8.06" ceiling cut-outs and 8" mounting frames.
- Type non-IC. Access above ceiling required.
- This device is not intended for use with emergency exits.

### DIMENSIONS

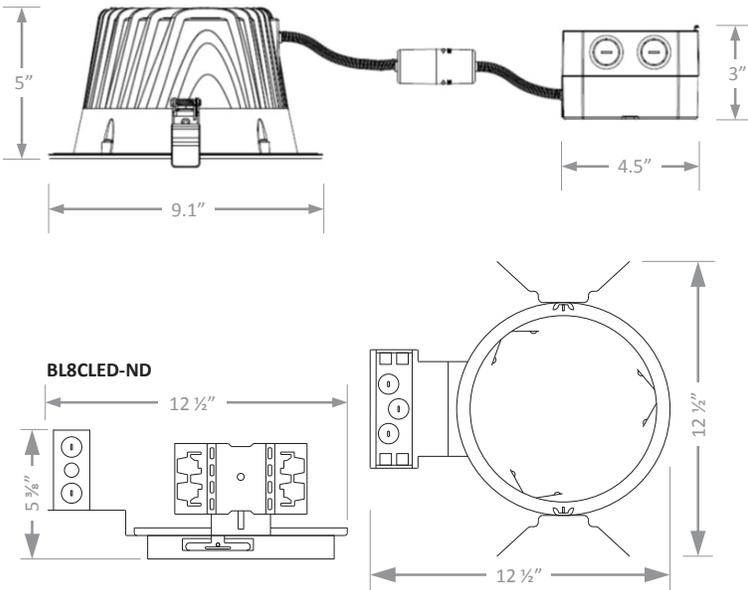

**Weight: 3 lbs.**

### WARRANTY

- cULus listed for wet locations.
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5 surge protection (line-neutral, 1kV).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\*Contact factory for other color temperatures and lumen packages.  
\*\*L70 hours are IES TM-21-11 calculated hours.

### ORDERING INFORMATION

EXAMPLE: BRK-8A-LKFS



Model	Lumen Output/Color Temperature		Accessories (Order Separately)
	Selectable Lumens	Selectable CCT	
BRK-8A	LKFS*	2,000 lm	BL8CLED-ND = Mounting frame with j-box
		3,000 lm	
		4,000 lm	
		5,000 lm	
*Field selectable			