

L70
25°C


50,000 Hours



FEATURES

- 28W model available in 3000k. 40W model available in 4000k.*
 - Long-life LEDs provide at least 70% of initial lumen output (L70) for 50,000 hours of operation.**
 - Provides up to 2,980 nominal lumens.
 - Color rendering index (Ra) > 80.
 - Input voltage = 120-277V (50-60Hz).
 - 0-10V dimming.
 - Installs from below ceiling and secured by tension clips.
- NOTE: tension clips are not provided with the luminaire.
- Flexible conduit with quick-connector is standard.
 - Integral heat sink for heat disbursement.
 - This device is not intended for use with emergency exits.

DIMENSIONS

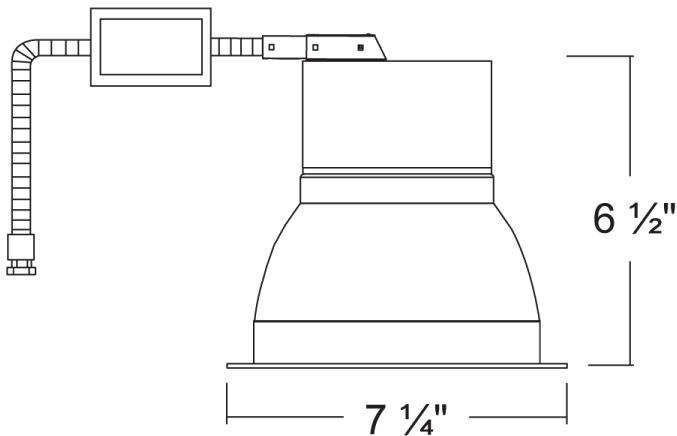

WARRANTY

- cULus listed for damp and wet locations.
- Title 24 compliant.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

*Contact factory for other color temperatures and lumen packages.

**L70 hours are IES TM-21-11 calculated hours.

ORDERING INFORMATION



| Model | Description |
|------------------|--|
| BRK-LED28ARC6-3K | 6" ARCHITECTURAL RETROFIT, 3000K, 2,210 LUMENS, 28 WATTS |
| BRK-LED40ARC6-4K | 6" ARCHITECTURAL RETROFIT, 4000K, 2,980 LUMENS, 40 WATTS |