

L70
25°C

347,000 Hours




NOTES:

FIXTURE TYPE:

PROJECT:



DIMENSIONS

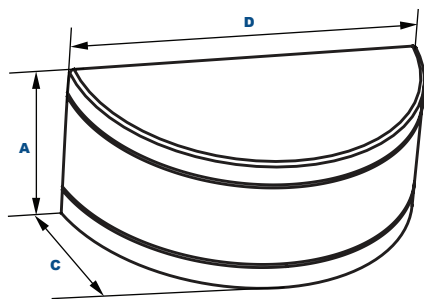

Dimensions

Width (D)	18" (458mm)
Length (B)	7 1/8" (181mm)
Height (A)	9 3/8" (232mm)

PRODUCT DESCRIPTION

The WP35Q cut-off architectural wall luminaire is available with IES Type III distribution designed to replace HID lighting systems from 150w to 250 MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 20 feet can be used based on light level and uniformity requirements.

FEATURES

Housing:

Die Cast Aluminum Housing with Full Cutoff Front Frame. Nickel-Plated Stainless Steel Hardware.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment.

Finish:

Textured Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Tempered Clear Flat Glass Lens

Mounting Options:

Mount Directly Over a 4 Recessed Outlet Box, Includes Easy-Hang "Two Hands Free" Wall Mounting Bracket with Built-In Level.

LED:

Aluminum Boards

Wattage:

23w Array: 26w, System: 26w 47w Array: 46.5w, System: 52w

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.
See Page 3 for Projected Lumen Maintenance Table.

ORDERING INFORMATION

EXAMPLE: WP35QC1X47U5KCZSP



Series	Optics	Wattage	Driver	CCT	Lens	Color	Options
WP35Q= EasyLED Crescent Wall Sconce Down Light	C=Type III	1X23=23w 1X47=47w	U=120-277V H=347-480V	3K=3000K 4K=4000K 5K=5000K	C=Clear Flat Glass Lens	Z=Bronze C=Custom (Consult Factory)	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection PC3=Photocell, 120-277VAC BU=Battery Backup, 90 Minutes* BUC=Cold Start Battery Backup, -20°C, 90 Minutes* *120-277V Models Only.

ACCESSORIES & REPLACEMENT PARTS

Replacement Parts
(Order Separately, Field Installed)

WP35GLC Tempered Clear Flat Glass Lens


P18103 120-277VAC Photocell

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.



P18103

PHOTOMETRIC DATA

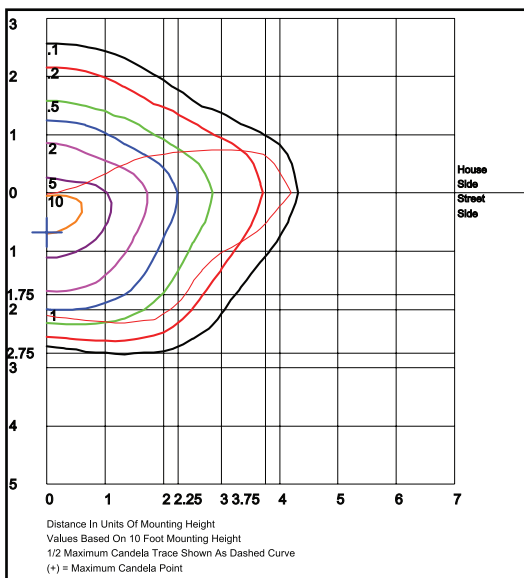

WP35QC1X47U5KC

Type III

Grid in MH

MH=10 Feet

PHOTOMETRIC PERFORMANCE

Wattage (Catalog Logic)		23W (1X23)	47W (1X37)
Input Watts		26W	52.9W
Optic	CCT	Delivered Lumens	
C = Type III	3000K	2,228	4,552
	4000K	2,318	4,736
	5000K	2,408	4,921
	BUG Rating	B1-U1-G1	B1-U1-G1

PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 53w	1.00	0.98	0.96	0.91	347,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.91	0.82	168,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.97	0.94	0.88	160,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.