


**Black****Bronze****White****DIMENSIONS**

| | |
|-------------------|---------------|
| Width(A) | 5" (127mm) |
| Height (B) | 3" (78mm) |
| Depth (C) | 1 1/4" (45mm) |

**PRODUCT DESCRIPTION**

The STP10Q Step Light provides fully shielded lighting for outdoor path, walkways and landscape areas. Optics are designed to replace outdated Halogen and Compact Fluorescent lighting systems. These fixtures are ideal for retail centers, restaurants, hotels, schools and universities, public transit and airports, office buildings and medical facilities.

FEATURES

Housing:
Die-Cast Aluminum Housing and Heatsink.

Listing & Ratings:
CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish:
Textured Black, Bronze, or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:
Frosted Tempered Glass Array Lens

Mounting Options:
Mounts to Standard Single Gang Junctions Box with (2) 1 1/2" - 6-32 Philips Bevel Head Stainless Steel Screws.

LED:
Aluminum Boards

Wattage:
Array: 4w, System: 3.2w


Driver:
On-Board Electronic Driver, 120V, 50/60Hz; Less Than 20% THD and PF>0.90.

Warranty:
2-Year Warranty for -20°C to +40°C Environment.


ORDERING INFORMATION**ORDER EXAMPLE: STP10QF1X41204KB**

| Model | Optic | Wattage | Driver | CCT | Color |
|------------------------|----------|---------|-----------|-----------|---|
| STP10Q =LED Step Light | F=Type V | 1X4 =4w | 120 =120V | 4K= 4000K | Z=Bronze B=Black W=White C=Custom (Consult Factory) |

PHOTOMETRIC DATA

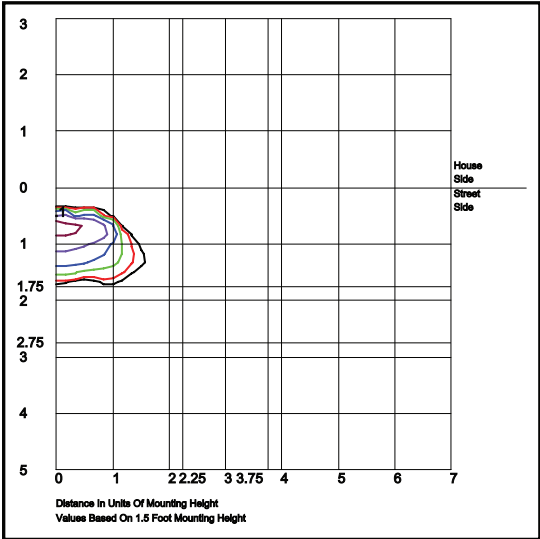

STP10EQF1X41204K
Type V
Mounted 18" Above Floor

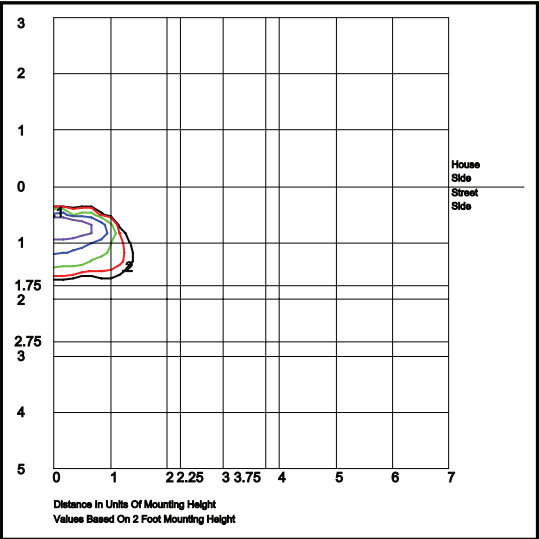

STP10EQF1X41204K
Type V
Mounted 24" Above Floor

PHOTOMETRIC PERFORMANCE

| LED Board Watts | Input Watts | Optic | 4000 CCT 80 CRI | | | |
|-----------------|-------------|--------|-----------------|---|---|---|
| | | | Lumens | B | U | G |
| LED 4w | 3.2 | Type V | 12 | 0 | 0 | 0 |