

L70  
25°C

50,000 Hours



NOTES:

FIXTURE TYPE:

PROJECT:



## SPECIFICATIONS

### Reflective Lens

For even light distribution.

### Lamp bollard

Round diecast aluminum housing.

### Emergency Battery (optional)



Emergency battery pack provides 90 minute runtime.  
Applicable ambient temperature is 10°C(50°F) to 40°C(104°F).

### Base (optional)

Round cast aluminum base.



CCT &amp; Power Adjustable



## FEATURES

- Efficacy higher than 115 lm/W with zero uplight while consuming only 26W.
- Round, diecast aluminum housing sized in 3.5ft height.
- Dark bronze polyester powder-coat finish.
- 360 degrees illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -40°C to 40°C (-40°F to 113°F).
- Optional emergency battery for 90 minute runtime.
- Robust anchor belts included.
- UL/cUL wet location listed and DLC qualified.
- Suitable for building entryways, walkway and pedestrian area, as well as any other location requiring a low-mounting-height light source.

## ORDERING INFORMATION

EXAMPLE: MBL01-26W-27V-50K-D

Model	Wattage	Voltage	CCT	Finish	Battery Backup (Option)	Internal Code
MBL01 = Bollard Light	26 = 26W	27V = 120-277V	DDK <sup>1</sup> = Adjustable Color Temperature	D = Dark Bronze	B = With Emergency Battery Blank = Without Emergency Battery	Blank = Alphanumeric

**Notes** 1. CCT Adjustable (3000K/4000K/5000K)




## DIMENSIONS

unit: inch/mm

Net Weight:

26W:12.136 lbs

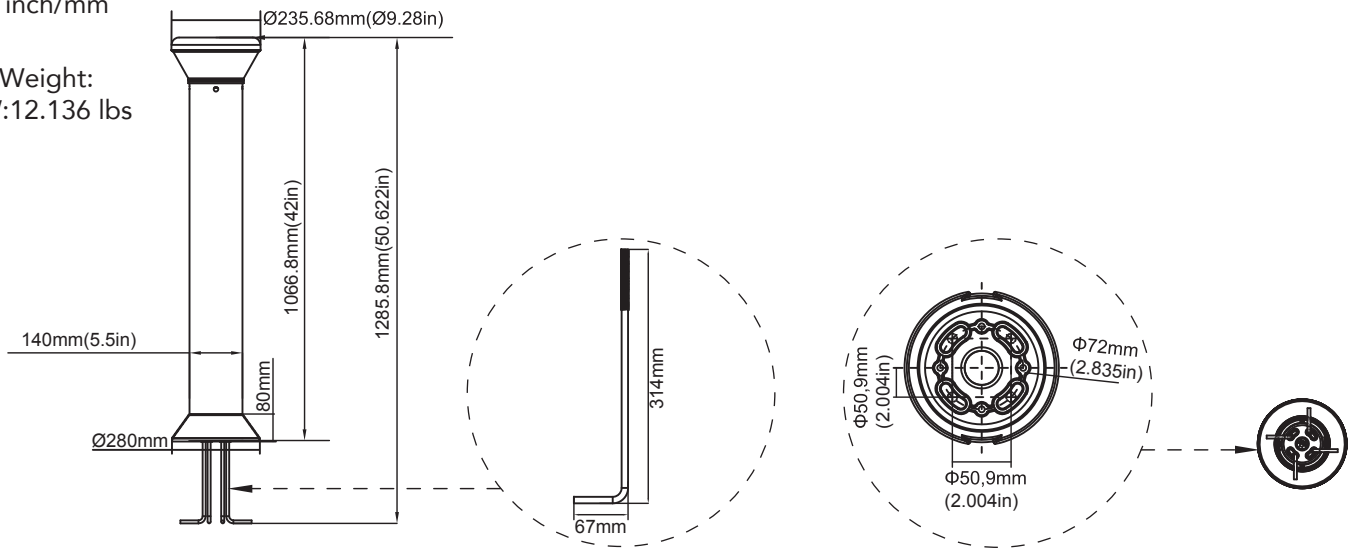

## PERFORMANCE DATA

		3000K(CRI70)		4000K(CRI80)		5000K(CRI80)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
26W	120-277V	2800lm	110lm/W	3000lm	115lm/W	3100lm	119lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09

## DLC MODEL NUMBER

SYSTEM WATTS	VOLTAGE	CCT	DLC NO.	DLC Classification
26W	120-277V	4000K	MBL0126W 27V40K[D,B,W][Blank,B][Blank,A-Z,a-z,0-9]	Standard
	120-277V	5000K	MBL0126W 27V50K[D,B,W][Blank,B][Blank,A-Z,a-z,0-9]	Standard