- Available in LED & Incandescent
- Fade & Rust Resistant Composite Construction
- Black, White, or Bronze
- Optional Photocell
- UL Listed for Wet Locations

HORIZON

FH100

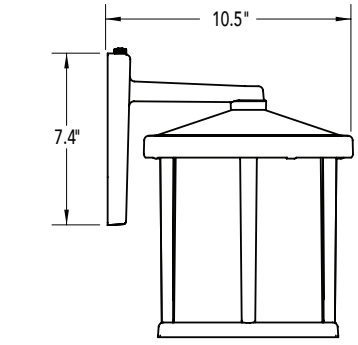

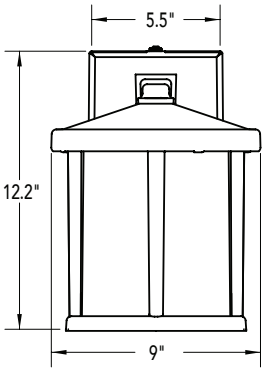

ASSEMBLED IN USA

RoHS compliant

ASK ABOUT ENERGY STAR

US Pat. No. 10,670,203 - Additional Patents Pending

EXAMPLE # FH100-I60-ZF-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FH100	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40˚C TO +40˚C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W, 80 CRI >88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K LE1200 - 14W, 80 CRI >102 Lumens Per Watt** W-1430lm 3000K C-1500lm 4000K	B-Black W-White Z-Bronze	ACRYLIC F-Glare Free Frost	P-Photocell
	INCANDESCENT, MEDIUM BASE, 120V I60 -1 X 60W Max	B-Black W-White Z-Bronze	ACRYLIC F-Glare Free Frost	P-Photocell LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 80CRI, 3000K LCE -A19/E26, 80CRI, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.