



SPECIFICATIONS & FEATURES

Housing:

Die Cast Housing with Chromate Conversion Coating, Includes Handle, Magnet on Back, Feet for Bottom, Cord Set with Molded Three-Prong Plug, and Liquid-Tight Connector.

Listing & Ratings:

CSA: Listed for Dry Locations, ANSI/UL 1598, 8750; IP54 Sealed LED Compartment.

Finish:

Yellow Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Standard Clear UV-Stabilized Polycarbonate Prismatic Lens

Mounting Options:

Attached Handle Allows Hanging on Hook, Magnet Allows Attaching to Steel Surfaces, or Stands with Attached Feet on Floor.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 45.4w, System: 52.6w; (175w HID Equivalent)

Driver:


Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps. Cord Set for 120V Use Only.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

Dimensions

Length (D)	9" (229mm)
Width (C)	12 3/4" (314mm)
Height 1 (A)	12 3/4" (314mm)
Height 2 (B)	14 3/8" (365mm)

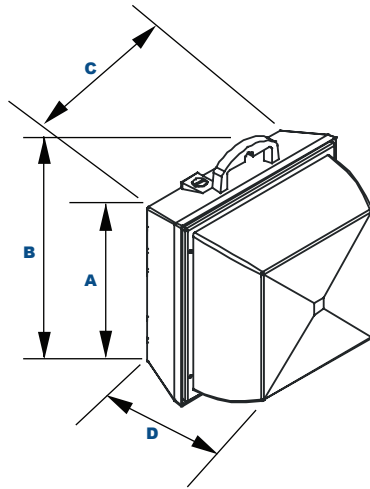

ORDERING INFORMATION

EXAMPLE: WL40Q-F-1X45-U-5K-S-Y-SF



Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
WL40Q = LED 12" Temporary Worklight	F=Type IV	1X45 =45w	U=120-277V* Wired For 120V	5K =5000K	S=Standard Clear UV- Stabilized Polycarbonate Prismatic Lens	Y =Yellow C =Custom (Consult Factory)	SF =Single Fuse (120-277V Only) DF =Double Fuse (120-277V Only) SP =Surge Protection

PHOTOMETRIC PERFORMANCE

5000 CCT 85 CRI

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	LPW
EasyLED 45w	525	53	Type IV	5,138	97