

**L70**  
25°C

**160,000 Hours**



NOTES:

FIXTURE TYPE:

PROJECT:



**ELECTRICAL**

- Universal 120V AC voltage (60Hz) is standard.
- Triac dimming.
- Input transient surge protection = 0.5kV.
- Power factor > 0.90.

**OPTICAL SYSTEM**

- Plastic diffuser.
- Field selectable 2700k(soft white), 3000k(warm white), 3500k(warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures\*.
- Delivers a range of 1,200 to 2,000 nominal lumens\*.
- Long-life LEDs provide 139,000 hours of operation with at least 70% of initial lumen output (L70)\*\*.
- LED color maintenance <-0.00346 chromaticity shift ( $\Delta u'v'$ ) over the initial 6,000 hours of operation.
- Color rendering index > 90.

\* Factory Default kelvin temperature 4000k and highest lumen output  
\*\*L70 hours are IES TM-21-11 calculated hours.


**CODE COMPLIANCE**

- cETLus listed for damp locations.
- Complies with FCC part 15, class B.

**WARRANTY**

- 5 year warranty on all electronics and housing.

**DIMENSIONS**

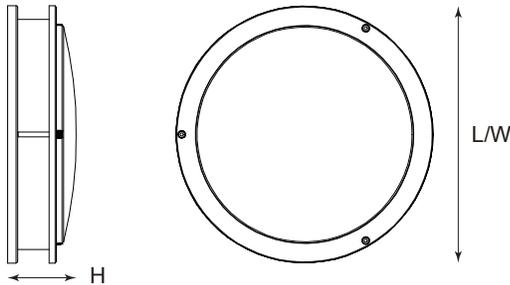

Model #	L (in)	W (in)	H (in)	Weight (lbs)
DR12-12L-5CCT	11.81	11.81	3.54	1.66
DR14-18L-5CCT	13.78	13.78	3.54	2.21
DR16-20L-5CCT	15.75	15.75	3.54	3.10

**HOUSING**

- Brushed Nickel steel, white housing.

**MOUNTING**

- Surface mounting and retrofit installation.
- Covered ceiling mount .

**ORDERING INFORMATION**

EXAMPLE: DR12-12L-5CCT



Model	Nominal Lumen Output	Kelvin (Selectable)
DR-12	12L = 1200 lm / 17W	5CCT = 2700 / 3000 / 3500 / 4000 / 5000K
DR-14	18L = 1800 lm / 22W	
DR-16	20L = 2000 lm / 26W	

**COMPATIBLE DIMMERS AND CONTROLS**

Manufacturer	Model Number		
<b>Lutron</b>	TG-600PR-WH	SLV-600P-AL	DVCL-153P
	S-600PR-WH	DV-600PR-WH	MSCL-OP153M
	CTCL-153PDH-WH	SCL-153PH-WH	PD-6WCL
	TGCL-153PH-LA	GT-600P	MACL-153M//MA-R
<b>Leviton</b>	6672	6674	IPL06
	RNL06	DSL06	-