



NOTES:

FIXTURE TYPE:

PROJECT:



FEATURES

LED:

- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) - Consult Factory

Distribution:

- Types II, III, IV, V

Electrical:

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10v Dimmable Driver (Dimming leads capped inside housing)
- Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)

Controls (Optional):

- Button Eye Photo Control (PC)
- House Side Shield (H)

Housings:

- Bottom Section is Extruded Aluminum
- 8" Round x .125" Wall with Internal Anchor Bolt Plate for Mounting to Concrete Foundation

Finish:

- Super Durable Polyester Powder Coat Finish.
- Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings:

- ETL Listed to UL 1598 Standard for Wet Location. LED is IP66 Rated

Warranty:

- 5 Year Limited Warranty

PRODUCT DESCRIPTION

The Signature Star Bollard Collection represents a fresh evolution of our USA Made, BABA Compliant lighting crafted with the same attention to detail that defines our most trusted fixtures. This new generation features a more modern design delivering stronger performance for both ambient illumination and architectural accents. Designed for specification grade projects, the collection emphasizes durability, visual refinement, and dependable consistency, offering a compelling American built alternative to overseas options. With Signature Star, you're investing in American manufacturing & craftsmanship, long-term dependability, and elevated design built to meet the demands of today's modern environments.

ORDERING INFORMATION

EXAMPLE: BRDT-42-CA-30-5K-U-5-PC-BK




Model	Heights	Globe/Lens	Wattage	CCT	Voltage	Optics	Options	Finish
BRDT= Round Dome Bollard	42=42" (Standard) 36=36" (Adder) 30=30" (Adder)	WA=White/Opal Acrylic* FA=Frosted Acrylic CA=Clear Acrylic CO=Clear Acrylic With Semi Specular Cone *Type V Only	10=10w 15=15w 20=20w 30=30w	3K=3000K 4K=4000K 5K=5000K	U=120-277V H=347/480V	2=Type II 3=Type III 4=Type IV 5=Type V	N=None PC=Button Eye Photo Control H=House Side Shield USB=Dual USB Port* GFIC=GFI In-Use Cover, Cast Aluminum* GFIP=GFI In-Use Cover, Plastic* *Indicate Location	BK=Black BZ=Bronze DBZ=Dark Bronze TBZ=Textured Flat Bronze WH=White GR=Green SM=Silver Metallic GY=Light Gray TBK=Textured Black QBK=Textured Flat Black CC=Custom Color (Consult Factory)

LUMEN OUTPUT

Wattage (Catalog Logic)		10 Watts (10W)	15 Watts (15W)	20 Watts (20W)	30 Watts (30W)
Input Watts		10.2	14.6	20.4	30.6
Optic	CCT	Delivered Lumens			
2 = Type II Clear or Frosted	3K	1,344	1,763	2,352	3,527
	4K	1,371	1,800	2,400	3,600
	5K	1,392	1,828	2,437	3,655
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1
3 = Type III Clear or Frosted	3K	1,342	1,760	2,348	3,521
	4K	1,369	1,797	2,396	3,595
	5K	1,390	1,825	2,433	3,649
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1
4 = Type IV Clear or Frosted	3K	1,312	1,721	2,296	3,443
	4K	1,339	1,758	2,343	3,515
	5K	1,359	1,784	2,379	3,569
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1
5 = Type V Clear or Frosted	3K	1,373	1,801	2,402	3,603
	4K	1,401	1,839	2,452	3,678
	5K	1,423	1,867	2,489	3,734
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1
5 = Type V with White Opal Lens	3K	964	1,446	1,928	2,893
	4K	984	1,477	1,969	2,953
	5K	999	1,499	1,998	2,998
	BUG Rating	B1-U3-G1	B1-U3-G1	B1-U3-G2	B1-U4-G2

Please refer to the fixture's IES file for detailed information. Subject to change.

DIMENSIONS

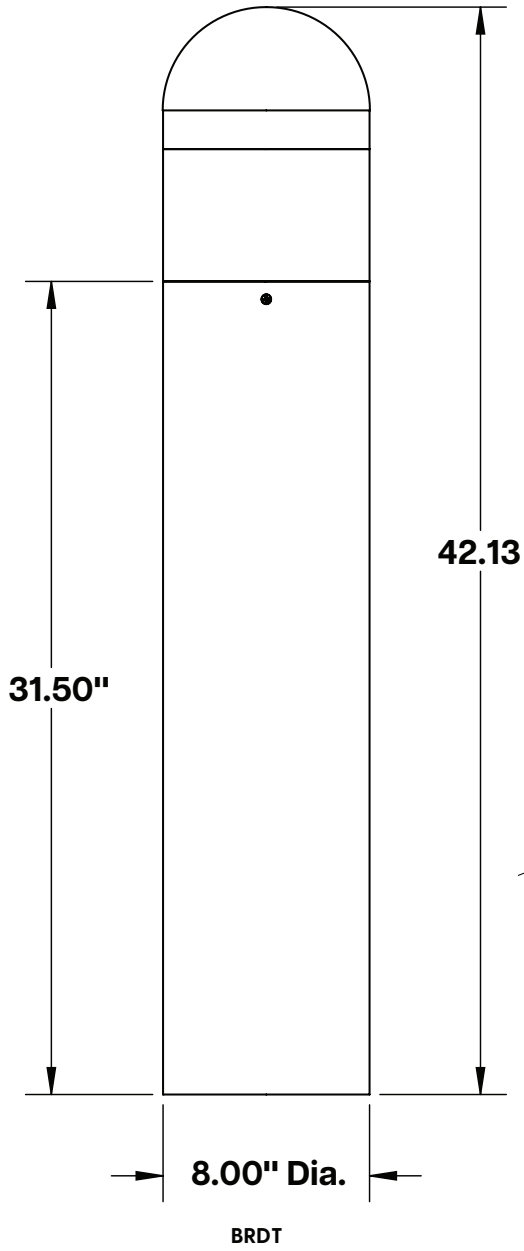

ANCHOR BASE DETAILS

